
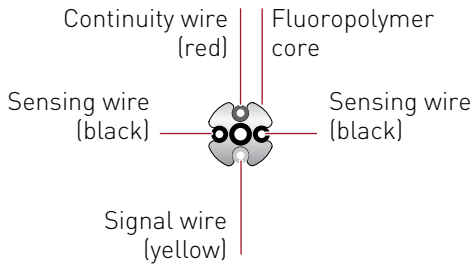


TRACETEK TT3000

SENSING CABLE FOR CONDUCTIVE LIQUIDS

Cable construction

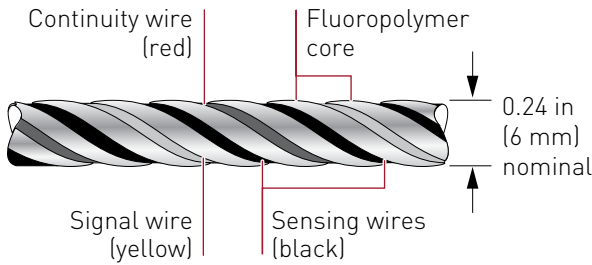

PRODUCT OVERVIEW

TraceTek TT3000 sensing cable detects the presence of conductive liquids at any point along its length. Most acids and bases and even deionized water can be sensed and located. Installed with a TraceTek alarm and locating module, the cable senses the presence of fluid, triggers an alarm, and pinpoints the location

Distributed sensing

TT3000 sensing cable provides distributed leak detection and location over a wide range of areas. The cable is available in a variety of lengths to provide as much coverage as needed.

Design flexibility


TT3000 sensing cable is available with factory-installed metal connectors that plug together. The measurement circuit is not dependent upon the conductivity of the leaking fluid. Therefore, the same cable will detect a wide range of fluids without special design considerations or calibration.

The cable is designed for a variety of applications, including floor surfaces, subfloors, equipment locations, pipes, storage tanks, and trenches. The cable is small, lightweight, and flexible, allowing easy installation. The smooth design allows quick drying.

Advanced technology


The Raychem conductive-polymer technology and fluoropolymer construction make TT3000 sensing cable mechanically strong and chemically resistant. The cable is constructed of two sensing wires, an alarm signal wire, and a continuity wire embedded in a fluoropolymer carrier rod. This rugged construction exposes no metal, and enables the cable to be reused even in corrosive environments.

ORDERING INFORMATION




TT3000 zone sensing cable with factory-installed connector and end termination

Catalog number	Part number	Description
TT3000-1.5M/5FT-MC	238539-000	5 ft (1.5 m) sensing cable with preinstalled heat-shrink end termination, prepared for zone system



TT3000 modular sensing cable with factory-installed connectors

Catalog number	Part number	Description
TT3000-0.3M/1FT-MC	148983-000	1 ft (0.3 m) sensing cable
TT3000-1.5M/5FT-MC	262789-000	5 ft (1.5 m) sensing cable
TT3000-3M/10FT-MC	842667-000	10 ft (3 m) sensing cable
TT3000-4.5M/15FT-MC	792293-000	15 ft (4.5 m) sensing cable
TT3000-7.5M/25FT-MC	103619-000	25 ft (7.5 m) sensing cable
TT3000-15M/50FT-MC	048179-000	50 ft (15 m) sensing cable
TT3000-30M/100FT-MC	301795-000	100 ft (30 m) sensing cable



TT3000 bulk sensing cable for installation in double-containment piping (connector kits required)

Catalog number	Part number	Description
TT3000-SC	155707-000	Bulk sensing cable on reel Minimum length: 250 ft (75 m) Maximum length: 1000 ft (300 m)

Connector kits (not shown)

Catalog number	Part number	Description
TT3000-CK-MC-M/F (includes test tools)	999313-000	Components for five mated pairs of connectors
TT3000-CK-MC-M	415441-000	One pin-type connector
TT3000-CK-MC-F	494333-000	One socket-type connector

Note: Refer to the Product Selection Guide (H55869) for other components of the TraceTek system.

PRODUCT CHARACTERISTICS

Cable diameter	0.24 in (6.0 mm) nominal
Cable diameter with connector	0.52 in (13 mm) nominal
Continuity and signal wires	2 x 26 AWG with fluoropolymer insulation
Sensing wires	2 x 30 AWG with conductive fluoropolymer jacket
Core	Fluoropolymer
Cable weight (50 ft/15 m length)	2.3 lb (1 kg)

TECHNICAL INFORMATION

Breaking strength	160 lb (72 kg)
Cut-through force	>50 lb with 0.005 (>22 kg with 0.13 mm) in blade; crosshead speed 0.2 in/min
Abrasion resistance	>65 cycles per UL 719
Maximum continuous operating temperature	Sensing cable: 194°F (90°C) Cable connectors: 185°F (85°C)

CHEMICAL RESISTANCE

Cable functions normally after exposure in accordance with ASTM D 543 at 77°F (25°C) for seven days:	Trichloroethylene	{100%}
	Sulfuric acid	{98%}
	Hydrochloric acid	{37%}
	Hexane	{100%}
	Methanol	{100%}
	Sodium hydroxide	{10%}
	Xylene (100%)	{100%}
Note: Prolonged exposure to concentrated ketones may cause temporary reduction of sensitivity; consult factory.	Aqua regia	

RADIATION RESISTANCE

Cumulative radiation exposure of 10 megarad gamma radiation over design life of 30 years

APPROVALS AND CERTIFICATIONS

TraceTek TT3000 sensing cables are approved for installation in ordinary and hazardous areas when used in conjunction with approved TraceTek monitoring equipment and zener safety barriers when appropriate.

All TraceTek sensing cables are designated as “simple apparatus” and included in the approval certification for TraceTek monitoring instruments.

Consult the specific data sheets and approval certificates for the TraceTek TTSIM-128, TTSIM-1, TTSIM-1A, TTSIM-2, TTC-1 and TT-FLASHER-BE for application limitations and specific area approvals and certifications.





WWW.PENTAIRTHERMAL.COM

NORTH AMERICA

Tel: +1.800.545.6258
Fax: +1.800.527.5703
Tel: +1.650.216.1526
Fax: +1.650.474.7215
thermal.info@pentair.com

EUROPE, MIDDLE EAST, AFRICA

Tel: +32.16.213.511
Fax: +32.16.213.603
thermal.info@pentair.com

ASIA PACIFIC

Tel: +86.21.2412.1688
Fax: +86.21.5426.2937
cn.thermal.info@pentair.com

LATIN AMERICA

Tel.: +1.713.868.4800
Fax: +1.713.868.2333
thermal.info@pentair.com

Pentair and TraceTek are owned by Pentair or its global affiliates. All other trademarks are the property of their respective owners. Pentair reserves the right to change specifications without prior notice.

© 2009–2015 Pentair.

 @pentairTBS

**THERMAL BUILDING &
INDUSTRIAL HEAT TRACING SOLUTIONS**

Distributed By



Tel: (852) 2488 2370 Fax: (852) 2414 9213