
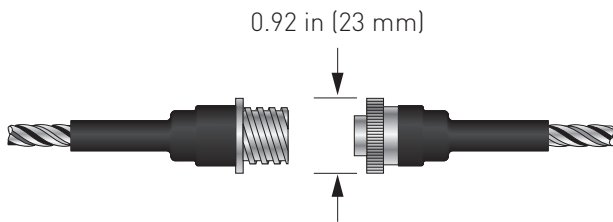
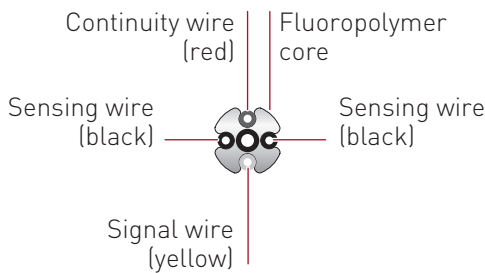


# TraceTek TT1000

## WATER SENSING CABLE

### Cable construction

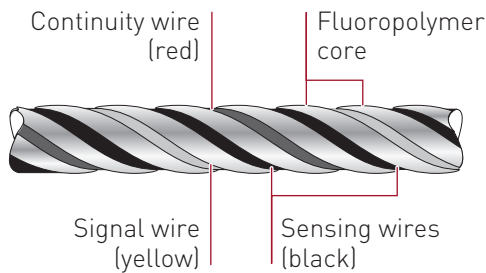

Drawing not to scale

### PRODUCT OVERVIEW

TraceTek TT1000 sensing cables detect the presence of water at any point along their length. Installed with a TraceTek alarm and locating module, the cable senses water intrusion, triggers an alarm, and pinpoints the location.

#### Distributed sensing

TT1000 sensing cables provide distributed leak detection and location over a wide range of areas. The cable is available in a variety of lengths to provide as much coverage as needed.



#### Design flexibility

TT1000 sensing cable is supplied with factory-installed plastic connectors that plug together. The cable is designed for a range of applications, including data center subfloors, telecommunication rooms, HVAC equipment locations, pipes, electrical vaults, storage areas, tanks, and roofs. The cable is small, lightweight, and flexible, allowing easy installation. The smooth design allows for quick drying.

#### Advanced technology

The Raychem conductive-polymer technology and fluoropolymer construction make TT1000 sensing cable mechanically strong and resistant to corrosion and abrasion. The cable is constructed of two sensing wires, an alarm signal wire, and a continuity wire embedded in a fluoropolymer carrier rod. The alarm module constantly monitors the sensing cable for continuity. The rugged cable construction exposes no metal, and enables the cable to be reused even in corrosive environments.

**ORDERING INFORMATION**



**TT1000 modular sensing cable with factory-installed connectors**

Catalog number	Part number	Description
TT1000-1M/3FT-PC	409271-000	3 ft (1 m) sensing cable
TT1000-3M/10FT-PC	391887-000	10 ft (3 m) sensing cable
TT1000-5M/17FT-PC	072827-000	17 ft (5 m) sensing cable
TT1000-7M/25FT-PC	017859-000	25 ft (7 m) sensing cable
TT1000-15M/50FT-PC	805147-000	50 ft (15 m) sensing cable
TT1000-30M/100FT-PC	396807-000	100 ft (30 m) sensing cable
TT1000-50M/165FT-PC	P000000873	165 ft (50 m) sensing cable

**TT1000 bulk sensing cable (connector kits required)**

Catalog number	Part number	Description
TT1000-SC	683901-000	Bulk sensing cable on reel Minimum length: 250 ft (75 m) Maximum length: 1000 ft (300 m)

**Connector kits (not shown)**

Catalog number	Part number	Description
TT-1000 / JC-CK-PC-M/F	P000000080	Components for ten mated pairs of connectors

**Notes:**

- Refer to the Product Selection Guide (H53874) for other components of the TraceTek system.
- TT1000 sensing cables are compatible with existing TraceTek TT100 systems.

**PRODUCT CHARACTERISTICS**

Cable diameter	0.24 in (6.0 mm) nominal
Continuity and signal wires	2 x 26 AWG with fluoropolymer insulation
Sensing wires	2 x 30 AWG with conductive fluoropolymer jacket
Core	Fluoropolymer
Cable weight (50 ft/15 m length)	2.3 lb (1 kg)
Cable color	High-visibility yellow

**TECHNICAL INFORMATION**

Breaking strength	Cable only: 160 lb (72 kg) Including connectors: 70 lb (32 kg)
Cut-through force	>50 lb with 0.005 (>22 kg with 0.13 mm) in blade; crosshead speed 0.2 in/min
Abrasion resistance	>65 cycles per UL 719
Maximum continuous operating temperature	174°F (75°C)
Fire resistance	Class 2 plenum cable per NEC 1996 725-71 (a) UL 910 Modified Steiner Tunnel Test

**PERFORMANCE DATA**

Leak size to alarm (tap water)	2 in (50 mm) maximum at any point along sensing cable; up to 5000 ft maximum system length
Drying time	Cable dries and resets within 15 seconds of removal from standing water
Standard cleaning method	Wipe with clean damp cloth

## APPROVALS AND CERTIFICATIONS

---

TraceTek TT1000 sensing cables are approved for installation in ordinary and hazardous areas when used in conjunction with approved TraceTek monitoring equipment and zener safety barriers when appropriate.

All TraceTek sensing cables are designated as “simple apparatus” and included in the approval certification for TraceTek monitoring instruments.

Consult the specific data sheets and approval certificates for the TraceTek TTSIM-128, TTSIM-1, TTSIM-1A, TTSIM-2, TTC-1 and TT-FLASHER-BE for application limitations and specific area approvals and certifications.





[WWW.THERMAL.PENTAIR.COM](http://WWW.THERMAL.PENTAIR.COM)

**NORTH AMERICA**

Tel: +1.800.545.6258  
Fax: +1.800.527.5703  
Tel: +1.650.216.1526  
Fax: +1.650.474.7215  
[thermal.info@pentair.com](mailto:thermal.info@pentair.com)

**EUROPE, MIDDLE EAST, AFRICA**

Tel: +32.16.213.511  
Fax: +32.16.213.603  
[thermal.info@pentair.com](mailto:thermal.info@pentair.com)

**ASIA PACIFIC**

Tel: +86.21.2412.1688  
Fax: +86.21.5426.2917  
[cn.thermal.info@pentair.com](mailto:cn.thermal.info@pentair.com)

**LATIN AMERICA**

Tel: +55.11.2588.1400  
Fax: +55.11.2588.1410  
[thermal.info@pentair.com](mailto:thermal.info@pentair.com)

Pentair and TraceTek are owned by Pentair or its global affiliates. All other trademarks are the property of their respective owners. Pentair reserves the right to change specifications without prior notice.

© 1996–2013 Pentair.

**THERMAL MANAGEMENT SOLUTIONS**

Distributed By



Tel: (852) 2488 2370 Fax: (852) 2414 9213